


(GF-702A insert car fuse holder (horizontal mini car insert fuse holder))

1. Product size installation diagram

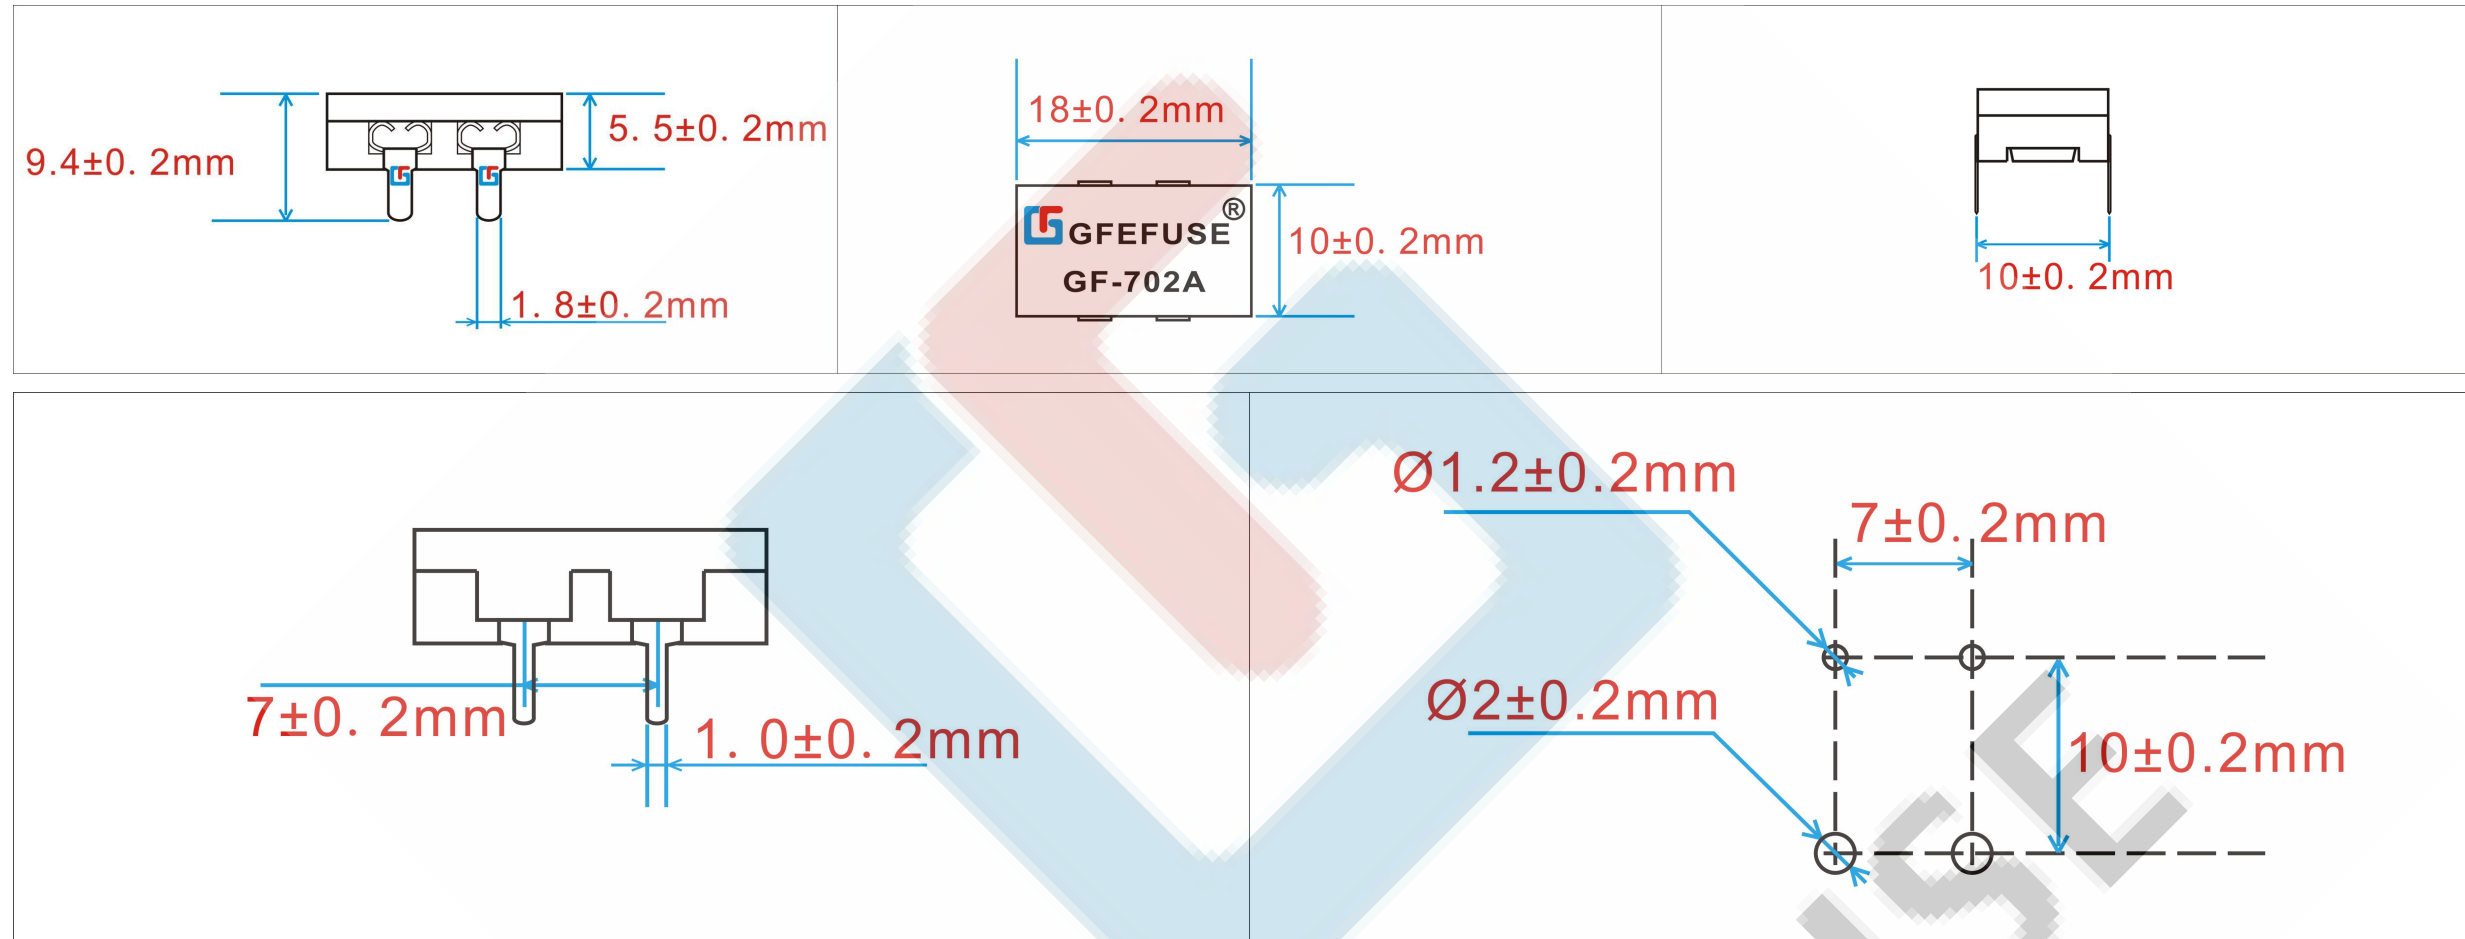

2. Product introduction

1. material: Contacts--brass, T=0.3mm; Base: PBT UL-94V0
2. terminal finish: Tin plated;
3. Matching mini-car insert fuses (GFEFUSE® GF-C series insert mini-fuses)
4. Suitable rated current: 30A@500VAC.
5. Insertion and extraction force: 1Kg Min.
6. Dielectric Strength: Min.AC1000V.
7. Contact Resistance: Max 50mΩ
8. temperature rise: 130° Max.
9. Insulation Resistance At 500V DC: 100mΩ
10. Welding temperature: 260 °C 3 seconds

Attention: Product size changes are not notified

The company has obtained the quality system certification of IATF:16949:2016 automobile industry.
The product has obtained UL CE CQC TUV REACH and many international certification.